

**FIG. 1**

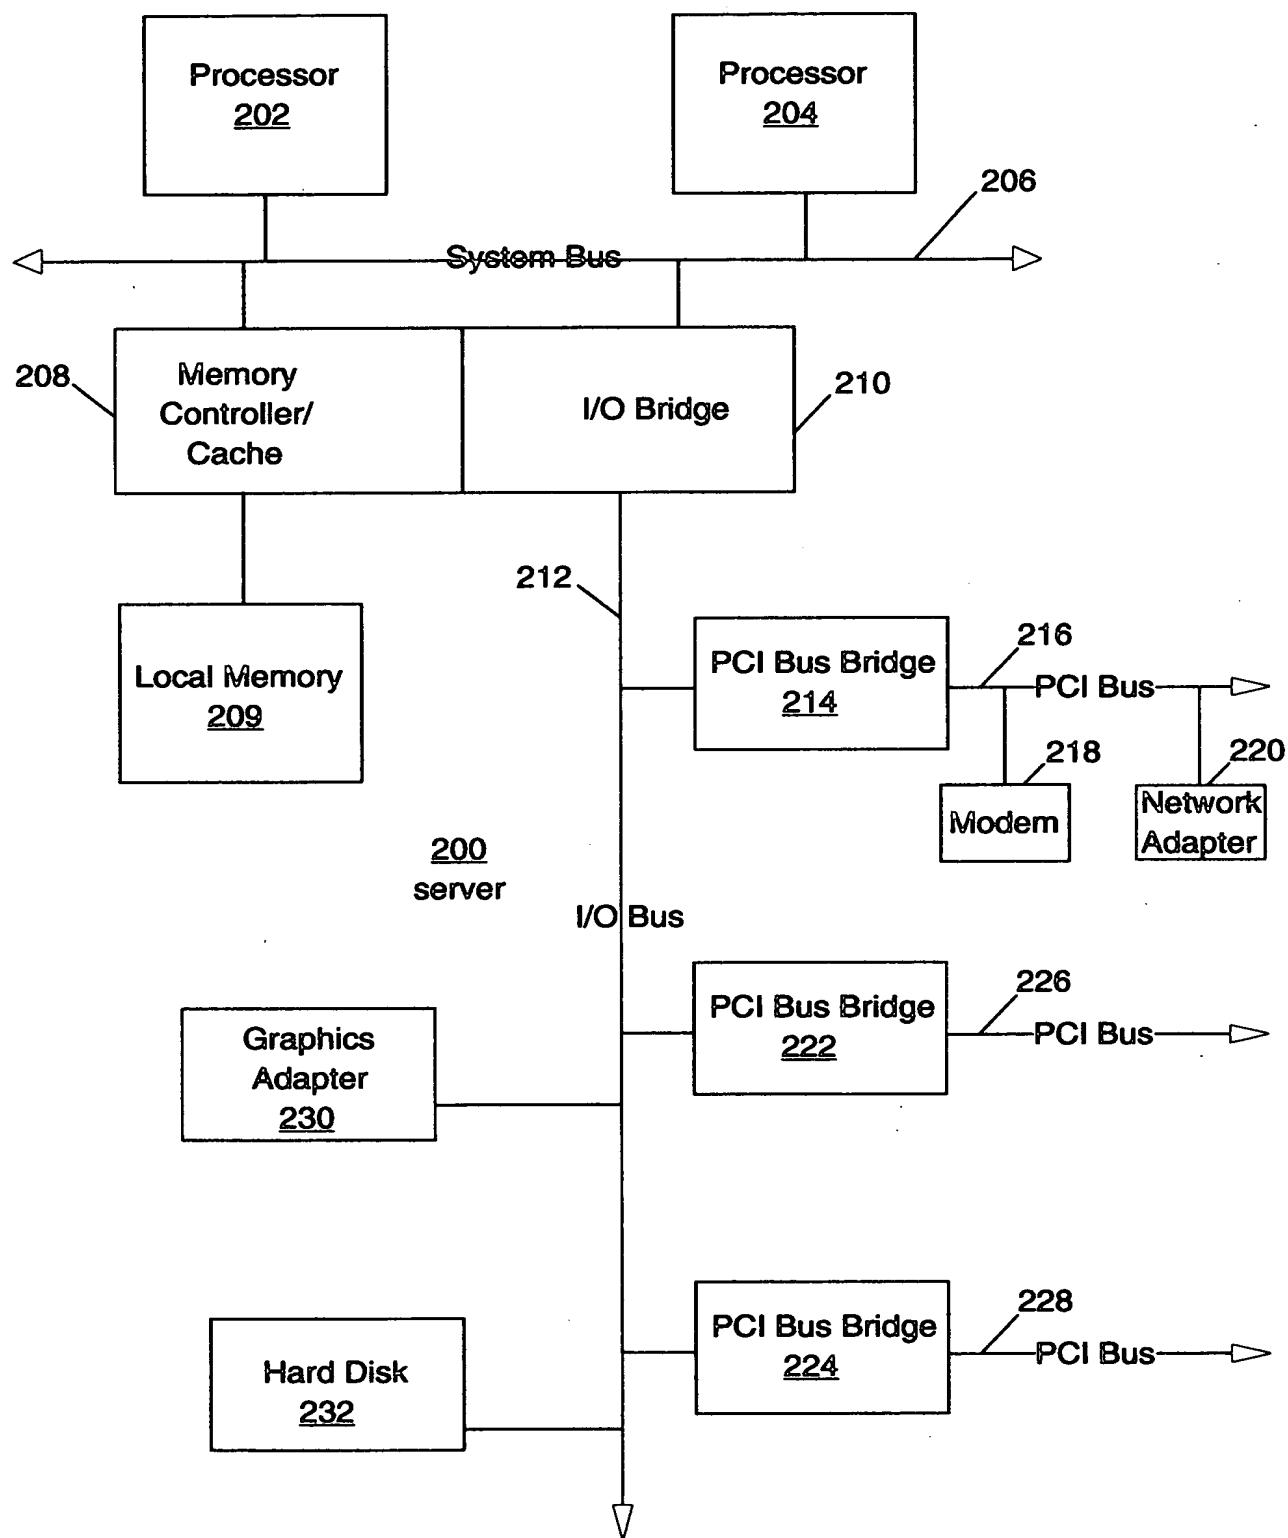


FIG. 2

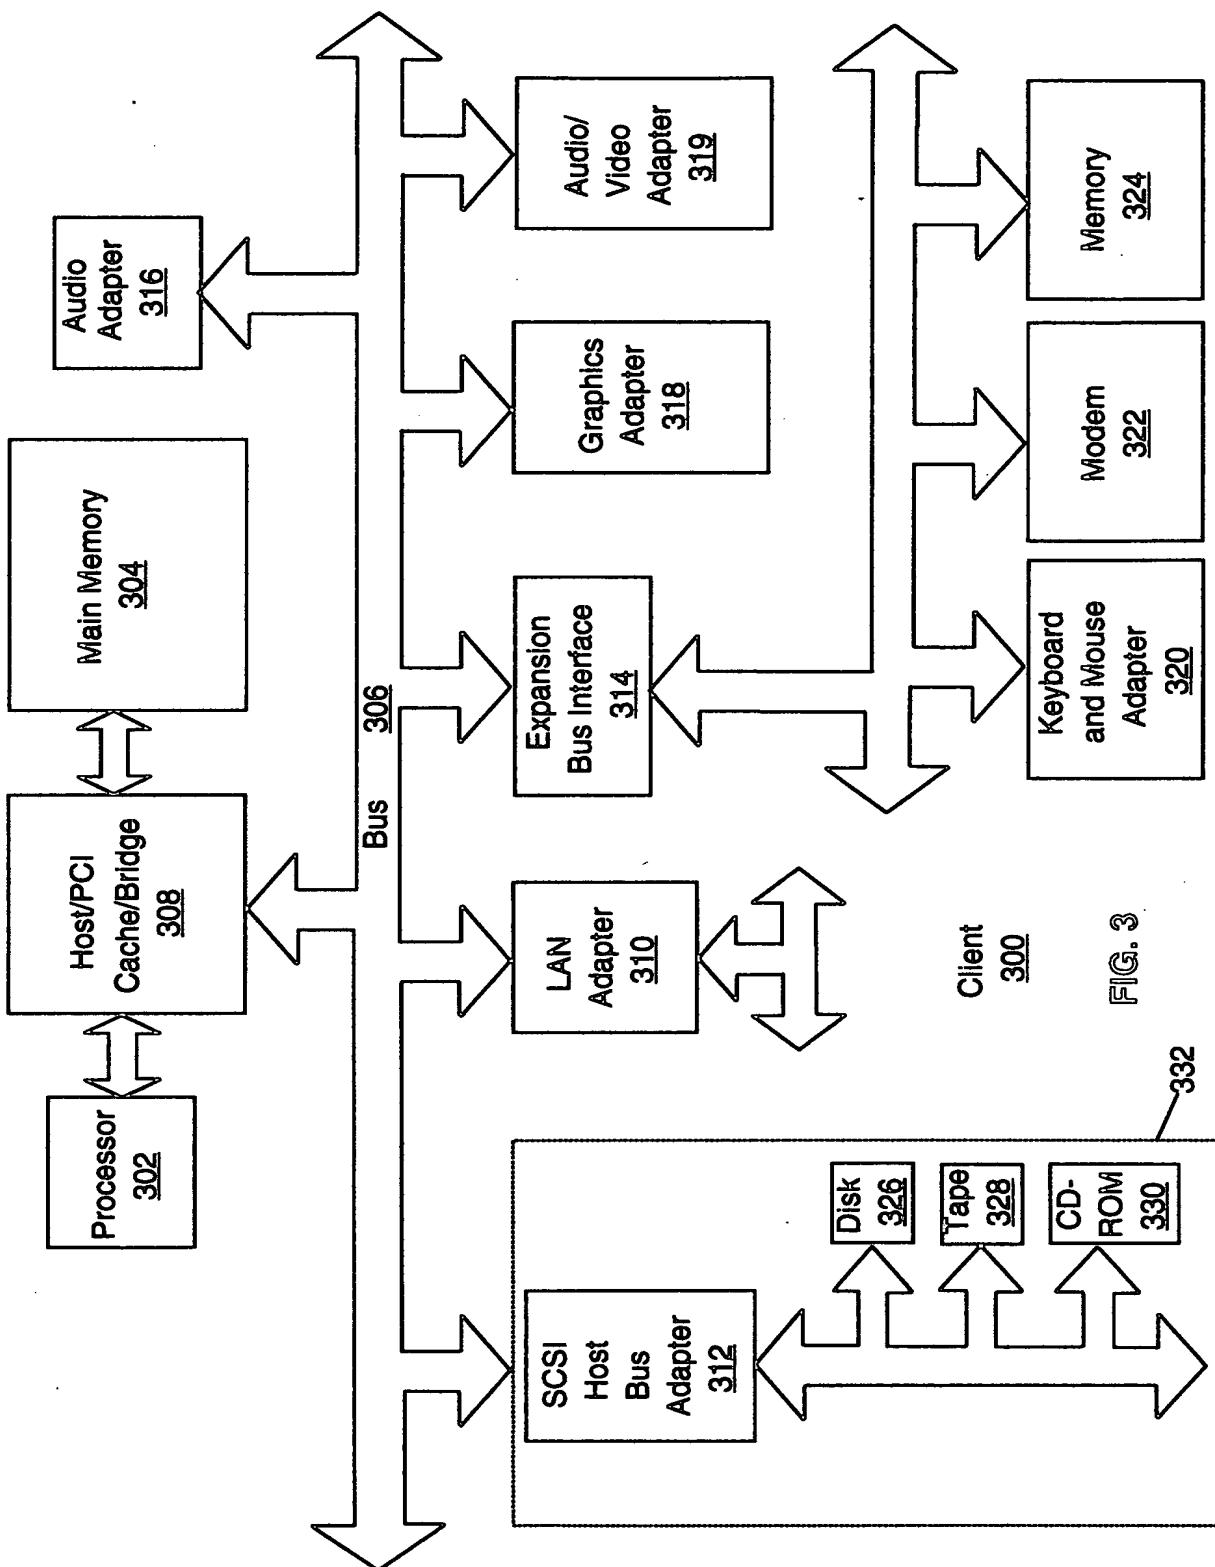


FIG. 3

332

240  
<HTML>  
  
<body> 242 245 246  
This is a <A HREF="http://www.ibm.com"  
244 TYPE ="text/html">  
link </A> 247 248  
243  
</body>  
  
</html> 241

FIG. 4A

250  
<wml>  
  
<card>  
This is card 1 253  
252 <A HREF="#card2">Jump to card 2</A>  
  
</card>  
<card id ="card 2" >  
Link to <A HREF="deck2.wml" 255  
254 SENDREFERER = "TRUE">  
deck2</A> 256  
</card>  
</wml> 251

FIG. 4B

341 342 343  
<A HREF="http://www.ibm.com/index.html"  
PROFILEATTRS = "HardwareCharacteristics:Screensizes"  
344 346 347  
345  
...</A>

This diagram shows a portion of an HTML document with annotations. Arrows labeled 341, 342, and 343 point to the attributes 'HREF' and 'PROFILEATTRS'. An arrow labeled 344 points to the opening tag '<A'. A bracket labeled 345 encloses the value of 'PROFILEATTRS'. Arrows labeled 346 and 347 point to the closing tag '>' and the ending tag '</A>' respectively.

**FIG. 5A**

350 <A HREF="http://www.ibm.com/index.html"  
351 PROFILEATTRS = "HardwareCharacteristics:Location;  
SoftwareCharacteristics:\"" >  
352 353  
...</A>


This diagram shows a portion of an HTML document with annotations. Arrows labeled 350 and 351 point to the attributes 'HREF' and 'PROFILEATTRS'. An arrow labeled 352 points to the opening tag '<A'. An arrow labeled 353 points to the closing tag '>'. The value of 'PROFILEATTRS' is enclosed in a bracket.

**FIG. 5B**

375 <A HREF = "http://www.ibm.com/index.html"  
376 PROFILEATTRS = !HardwareCharacteristics:Location;  
377 HardwareCharacteristics:ScreenSize" >  
378  
...</A>

This diagram shows a portion of an HTML document with annotations. Arrows labeled 375 and 376 point to the attributes 'HREF' and 'PROFILEATTRS'. An arrow labeled 377 points to the opening tag '<A'. An arrow labeled 378 points to the closing tag '>'. The value of 'PROFILEATTRS' is enclosed in a bracket.

**FIG. 5C**

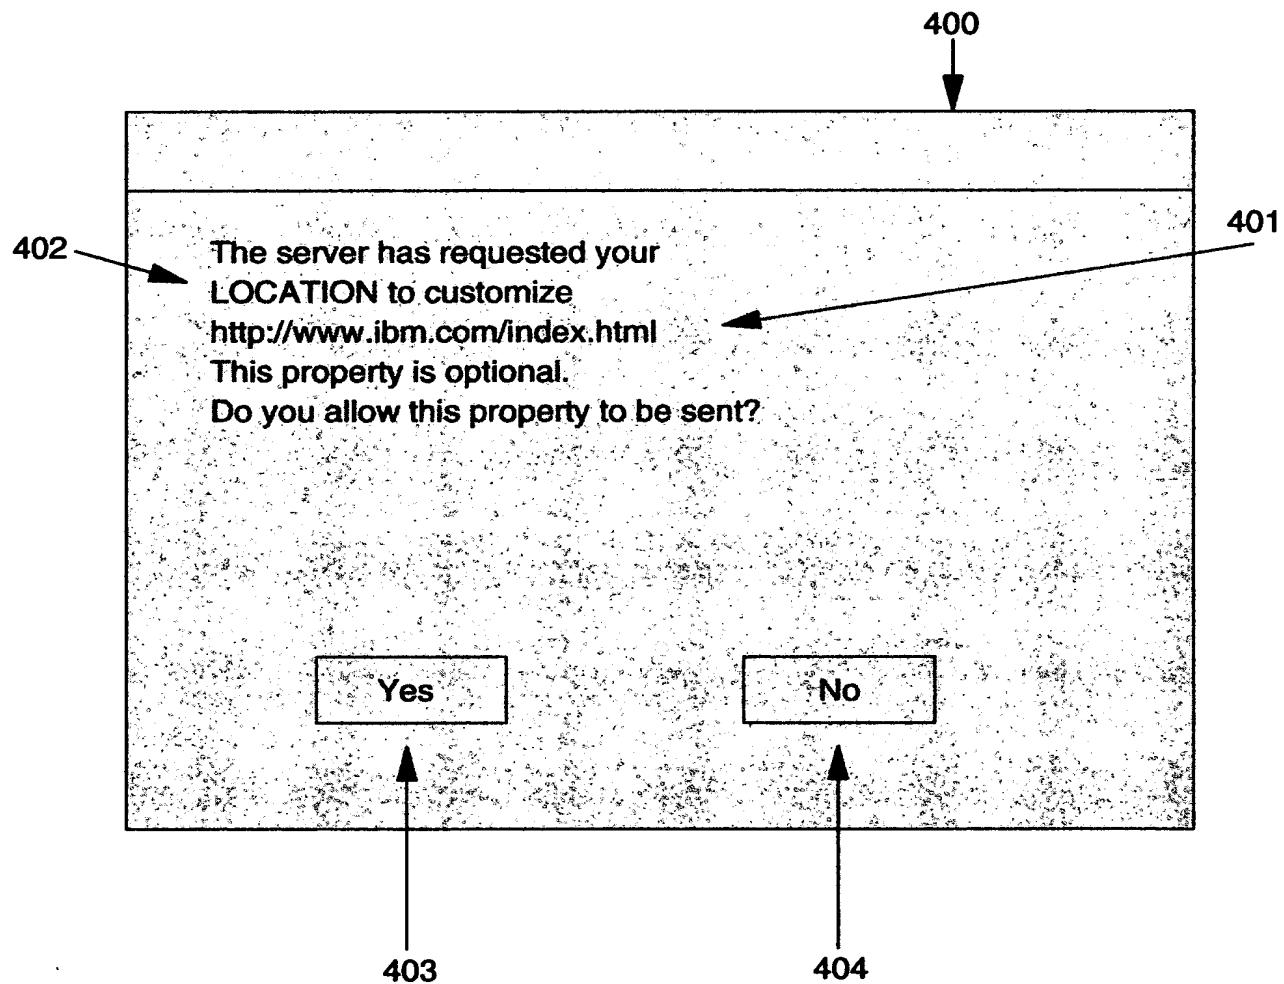

**FIG. 6**

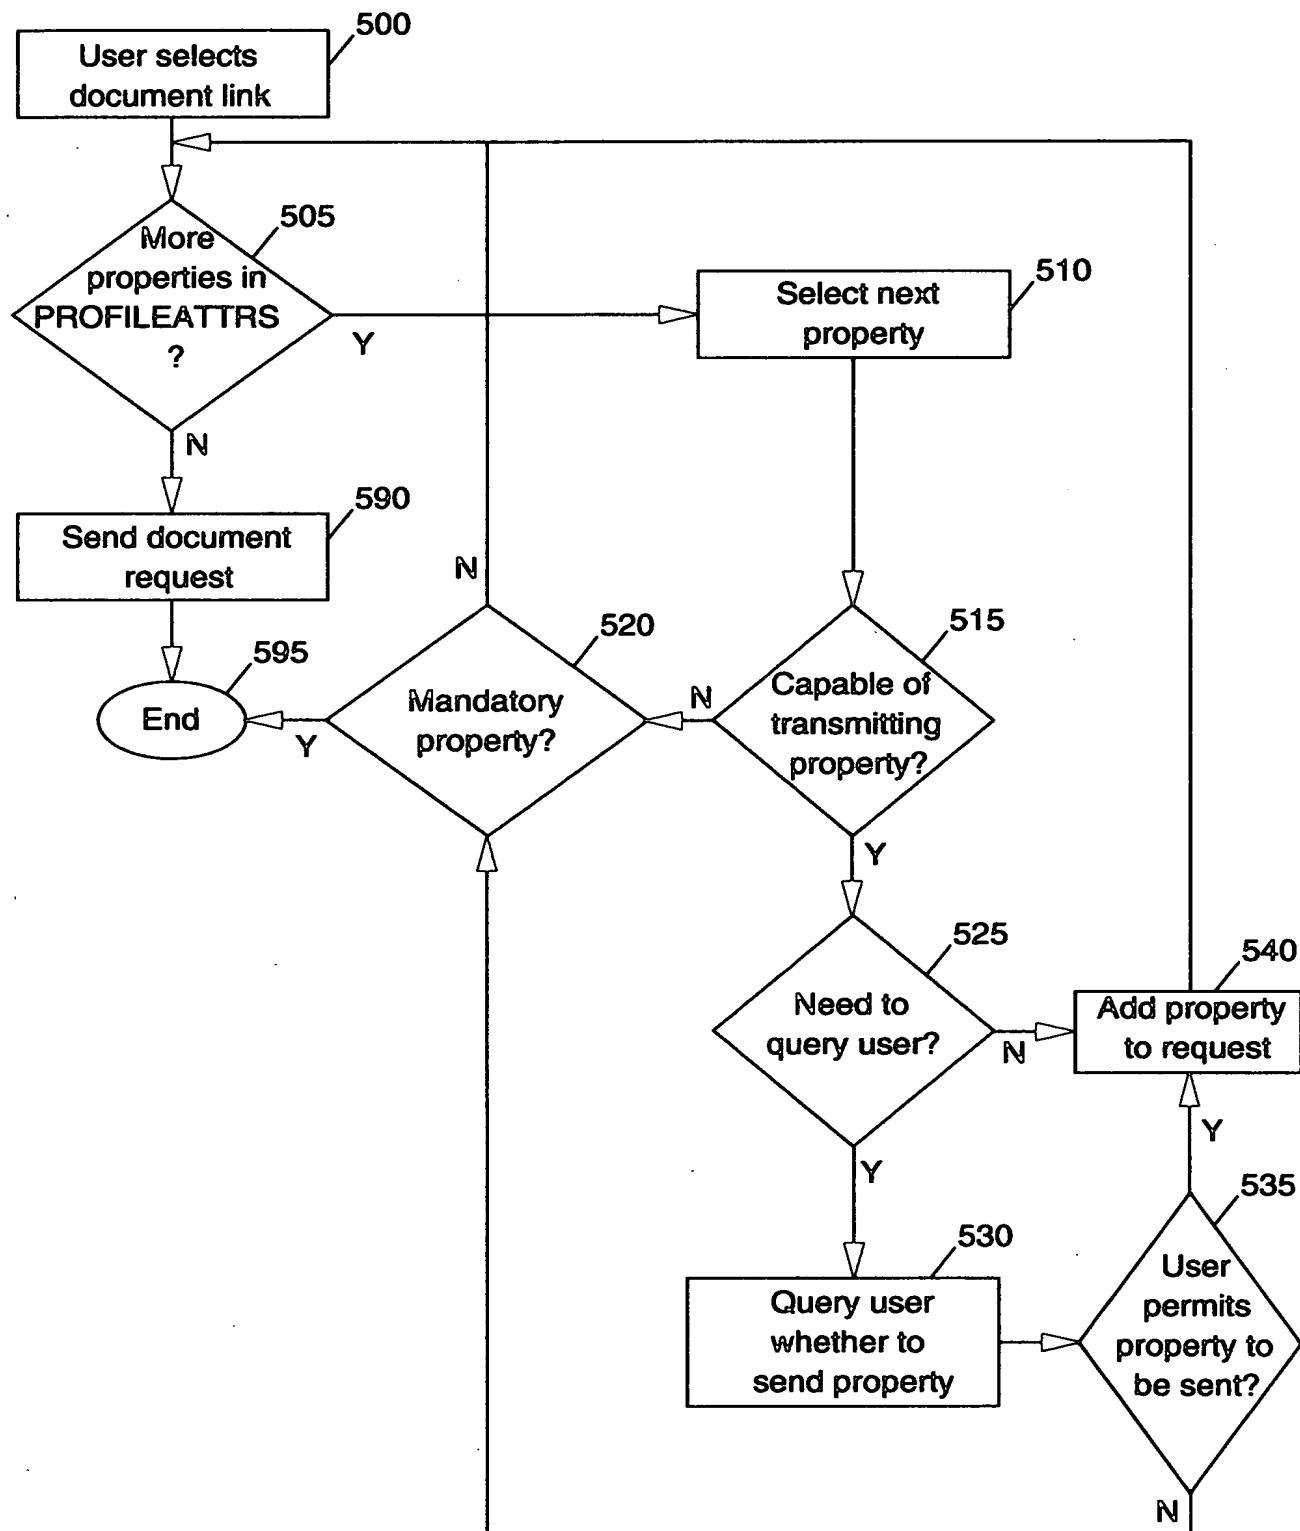


FIG. 7